

NXG-508N

xGenConnect 8 relay output expander

Increasing output capability


The NXG-508N adds 8 additional relay outputs to the GenConnect range of panels. Via a jumper, each Single Pole Double Throw (SPDT) Form C relay output can be configured in 3 different modes: as dry contact, or to switch the bus or externally supplied voltage to the output terminal, or to switch the bus ground to the output terminal. This allows to use the module in different applications. The status LED next to each output shows the actual state of the relay.

Installation

The module comes with a set of card slides allowing the module to be slided into the xGenConnect control panel enclosure.

Programming

Enrolling the module and programming the outputs is done from the control panel. The firmware of the module is upgradeable remotely via DLX900 or locally using the USB flash device.

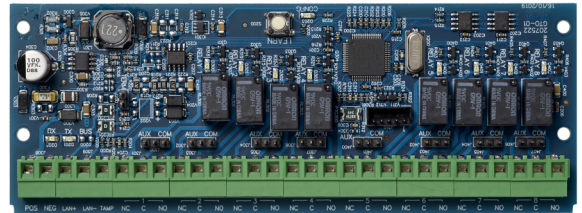

Details

- 8 relay output expander for xGenConnect
- Single Pole Double Throw (SPDT) Form C relays
- 3 selectable operating modes for each output
- Status LED for each output
- Seperate box tamper input
- "NetworX" form factor
- Firmware upgrade via USBUP-EUR flash tool or via DLX900 over the network
- EN50131-3 CLASS II GRADE 2, INCERT T031

NXG-508N

xGenConnect 8 relay output expander

Technical specifications

Inputs

Tamper input	Normally closed
--------------	-----------------

Outputs

No. of outputs	8 SPDT relays
Rated load	0.5A / 30VAC or 1A / 24VDC
Minimum load	1mA / 5VDC
Maximum load	1 A / 24VDC

Communication

Databus type	RS485
--------------	-------

Electrical

Operating voltage	12.0 to 13.5 VDC (provided by panel)
Current consumption	20mA (minimum, no outputs active) 130mA (maximum, all outputs active)

Physical

Physical dimensions	153 x 57 mm
Shipping weight	70 g

Environmental

Operating temperature	0 to +49°C
Storage temperature	-34° to 60°C
Relative humidity	85% relative humidity non-condensing

Standards & regulation

EN50131 Grade	Grade 2
Compliance	CE
Certification	EN50131 Grade 2, INCERT

